

AX6033

4-slot ShoeBox Chassis



Front view



Interior view


System

Standard Color	Beige (PANTONE 414C)
Construction	Heavy-duty cold-rolled steel
Drive Capacity	Exposed 1 x 3.5" HDD drive bay and one slim CD-ROM drive; Internal 1 x 3.5" HDD drive bay
Cooling	1 x 8 cm ball-bearing fan (42.5 CFM/each) with a removable filter
Front Panel Indicators	1 x power on/off; 1 x HDD
Rear Panel Controls	1 x power on/off; 1 x system reset
Pre-punched Rear Panel	2 x 9-pin; 1 x 25-pin; 2 x USB
System Board	Half-size SBCs
Expansion Interface	4-slot ISA or PCI backplane
Operating Temperature Range	0° C - 45° C (32° F - 113° F)
Dimensions	160 mm (6.3") (W) x 275 mm (10.8") (D) x 185 mm (7.3") (H)
Weight (net/gross)	4.5 kg (9.92 lb)/5.7 kg (12.57 lb)

Power Supply Specifications

Item	Specifications		
	Input	Output	MTBF
AC AT 70W	AC 115/230V (Auto)	+5V @ 10A +12V @ 1.5A -12V @ 0.3A	100,000 hours
DC AT 72W	DC 36~72V _{dc}	+5V @ 10A +12V @ 1.5A -12V @ 0.3A	100,000 hours
AC AT 100W	DC 115/230V _{dc} (Auto)	+5V @ 15A +12V @ 12A -12V @ 0.5A	100,000 hours

Dimensions

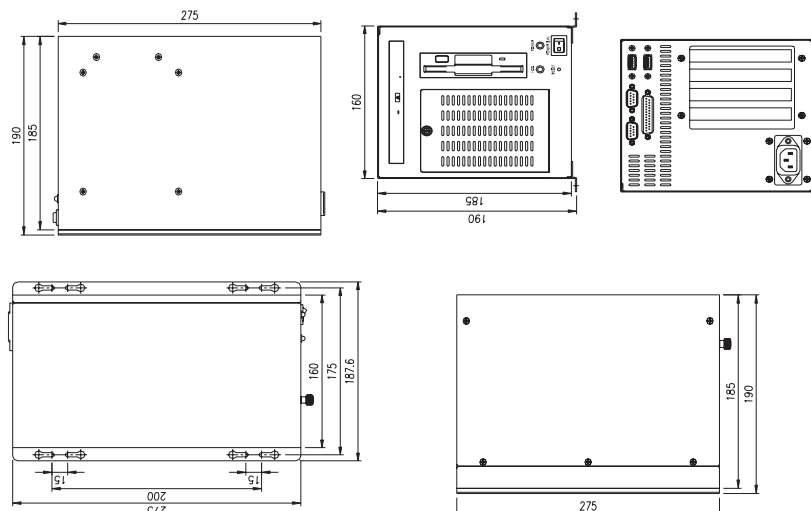

Features

- Compact design for embedded applications
- Supports half-size SBC
- One 3.5" HDD drive bay and one slim CD-ROM drive; one internal 3.5" HDD drive bay
- Equipped with a 70W power supply
- Optional DC power module

Ordering Information

AX6033WI/70	With ATX6020/4, AT 70W power supply
AX6033WC/70	With ATX6021/4, AT 70W power supply
AX6033WB/100	Without BP, with AT 100W power supply

*Specifications and certifications are based on options and may vary.

Embedded Systems

Embedded Field Controllers

Embedded MicroBoxes

Industrial Barebone Systems

Industrial Chassis

Industrial Workstations

Backplanes

Power Supplies

Peripherals & Accessories

Backplane Options

PICMG 1.0

Models	Slots per Segment (ISA/PCI/CPU)	Segment
ATX6020/4	4/0/0	Single
ATX6021/4	0/3/1	Single