

# AX60530

## 6-slot ShoeBox Chassis




### System

Standard Color	Beige (PANTONE 414C)
Construction	Heavy-duty cold-rolled steel
Drive Capacity	Exposed 1 x slim CD-ROM and 1 x 3.5" HDD drive bay, internal 1 x 3.5" HDD drive bay
Cooling	1 x 8 cm ball-bearing fan (38.6 CFM/each) with a removable filter
Front Panel Indicators	1 x power, 1 x HDD
Front Panel Controls	1 x system reset; 1 x power on/off
Front Panel Connectors	2 x USB & 1 x PS/2
Pre-punched Panel	2 x 9-pin & 1 x 25-pin
System Board	Half-size SBCs
Expansion Interface	6-slot ISA or PCI backplane
Hold-down Clamp	Rubber cushion
Operating Temperature Range	0°C ~ 40°C (32°F ~ 113°F)
Dimensions	191 mm (7.5") (W) x 273 mm (10.8") (D) x 195.7 mm (7.7") (H)
Weight (net/gross)	5.4 kg (11.9 lb)/6.8 kg (15 lb)

### Power Supply Specifications

Items	Watt	Specifications		
		Input	Output	MTBF
PS180-1U	ATX 180W (PFC)	AC90-264V (Auto)	+5V @ 16A +12V @ 14A -12V @ 0.8A +3.3 @ 10A +5V <sub>sb</sub> @ 2A	100,000 hours
PS200-1U	ATX 200W (PFC)	AC90-264V (Auto)	+5V @ 17A +12V1 @ 6A +12V2 @ 12A -12V @ 0.8A +3.3 @ 14A +5V <sub>sb</sub> @ 2A	100,000 hours

### Dimensions

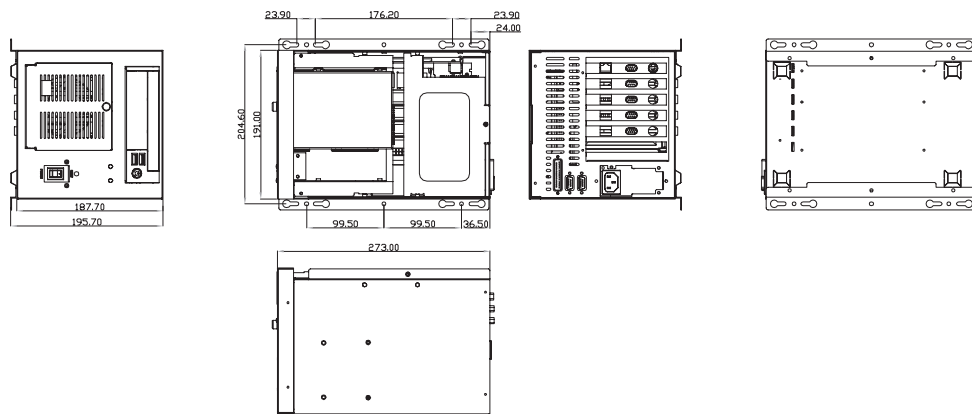

### Features

- Compact design for embedded applications
- Supports half-size SBCs
- Exposed one slim CD-ROM & one 3.5" HDD drive bay; internal one 3.5" HDD drive bay
- Equipped with ATX 180W power supply
- Easy-removable cooling fan

### Ordering Information

AX60530WB/X180P	With ATX 180W power supply
AX60530WB/X200P	With ATX 200W power supply
AX60530WB/X270P	With ATX 270W power supply

\*Specifications and certifications are based on options and may vary.

### Backplane Options

#### PICMG 1.0

Models	Slots per Segment (ISA/PCI/CPU)	Segment
ATX6020/6	6/0/0	Single
ATX6021/5	0/4/1	Single

#### PICMG 1.3

Models	Slots per Segment (ISA/PCI/PCle/CPU)	Segment
HAB205	0/4/0/1	Single
HAB206	0/3/1/1	Single

### Optional Items

- AXT 270W power supply with PFC
- 59460530030E USB cable 2.54 to 2.0 Dupont 400 mm (SBC82810 only)
- 59460530040E USB cable 2.54 Dupont to 2.0 housing 400 mm (SBC82820, SBC82702, SBC82700, SHB210 only)