


PANEL1153-841

15" TFT Expandable Intel® Core™2 Duo Industrial Panel Computer with 2 PCI Slots



Features

- 15" XGA TFT LCD display
- Intel® Core™2 Duo processor
- Intel® Q965 + ICH8 chipset
- Supports 2 PCI slots
- Built-in speakers & optional WLAN module
- Windows® Vista and 7 supported
- Supports panel mount and rack mount

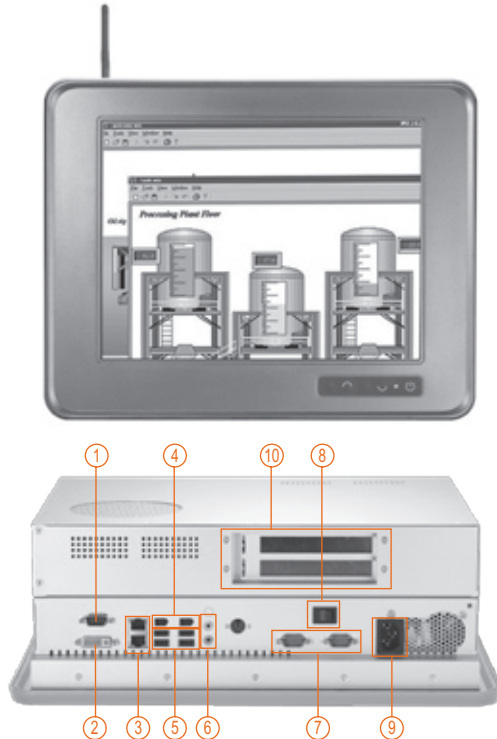

- | | | |
|------------------------------------|----------------------------|-----------------|
| 1. COM 1
(RS-232/RS-422/RS-485) | 4. IEEE 1394a x 2 | 8. Power switch |
| 2. DVI-I | 5. USB 2.0 x 4 | 9. AC power |
| 3. Ethernet x 2 | 6. Audio (Mic-in/Line-out) | 10. PCI x 2 |
| | 7. COM 2/3 (RS-232) | |



Side view

Introduction

The PANEL1153-841 is a 15" Industrial panel PC which features Intel® Core™2 Duo processor and Intel® Q965 chipset to provide powerful computing performance. This panel PC also offers the expansion ability with 2 PCI slots. Further, the PANEL1153-841 adopts built-in speaker and WLAN module for wireless connectivity.

Powerful computing: Intel® Core™2 Duo processor

The PANEL1153-841 features Intel® Core™2 Duo with a maximum of FSB 1066MHz and Intel® Q965+ICH8 chipset. It features two IEEE 1394a ports, two gigabit Ethernet ports and up to 4GB of dual-channel DDR2 system memory which deliver high computing capability for high performance-demanding applications.

Expandable for 2 PCI slots

The PANEL1153-841 has 2 PCI slots for expansion purpose. User can easily plug in standard half-size PCI cards such as motion card, communication card and so on.

Speaker & WLAN antenna supported

The PANEL1153-841 features built-in speaker, optional WLAN module and antenna for wireless network connectivity.

Specifications

Front Bezel	Industrial-grade material with IP65/NEMA 4 rugged protection		Chipset	Intel® Q965 + ICH8
LCD Panel	Display Type	15" XGA TFT	System Memory	2 x 240-pin DDR2 DIMM max. up to 4 GB
	Brightness (cd/m ²)	250 nits	BIOS	Phoenix-Award 4 Mbit with RPL/PXE LAN Boot ROM, SmartView and customer CMOS backup
	Resolution	1024 x 768 pixels	Storage	2 x 3.5" or 2 x 2.5" SATA HDD
	Viewing Angle (H/V)	140° / 120°	Drive	1 x built-in slim CD-ROM
Main system	CPU	LGA775 for Intel® Core™2 Duo/ Core™	Watchdog Timer	255 levels, 1-255 sec.
		Solo processor with FSB 533/667/800/ 1066 MHz		

I/O Connector	2 x RS-232 (COM 2/3) 1 x RS-232/422/485 (COM 1) 2 x IEEE 1394a 4 x USB 2.0 2 x PS/2 keyboard/mouse 2 x 10/100/1000Mbps Ethernet 1 x DVI-I for display (a converter for DVI-I to VGA is included) 1 x Audio (Mic-in/Line-out)
Expansion Interface	2 x PCI slot
Touchscreen	Resistive type Light Transmission 79% 1 million activations (typical) at a single point
Power supply	100 - 240V _{AC} , 250W
Dimensions	420 mm (16.54") (W) x 149.4 mm (5.88") (D) x 335 mm (13.19") (H)
Weight (net/gross)	6.6 kg (14.6 lb)/10 kg (22.0 lb)
Environment	Operating temperature: 0° - +40°C (32° - 104°F) Relative humidity: 10 - 95% @ 40°C, non-condensing Operation vibration: 1.0G, 5-500Hz, random
Certification	CE

Optional Accessories

82211530050E	2 x 3.5" HDD kit
82211580080E	2 x 2.5" HDD kit
82211530110E	Wireless LAN kit
82261580070E	Rack mount kit

Optional OS Installation


Windows® 2000/XP/Vista/7

Ordering Information

PANEL1153-841-R 15" TFT Intel® Core™2 Duo panel PC with 2 PCI slots

* Specification and certifications are based on options and may vary.

Dimensions

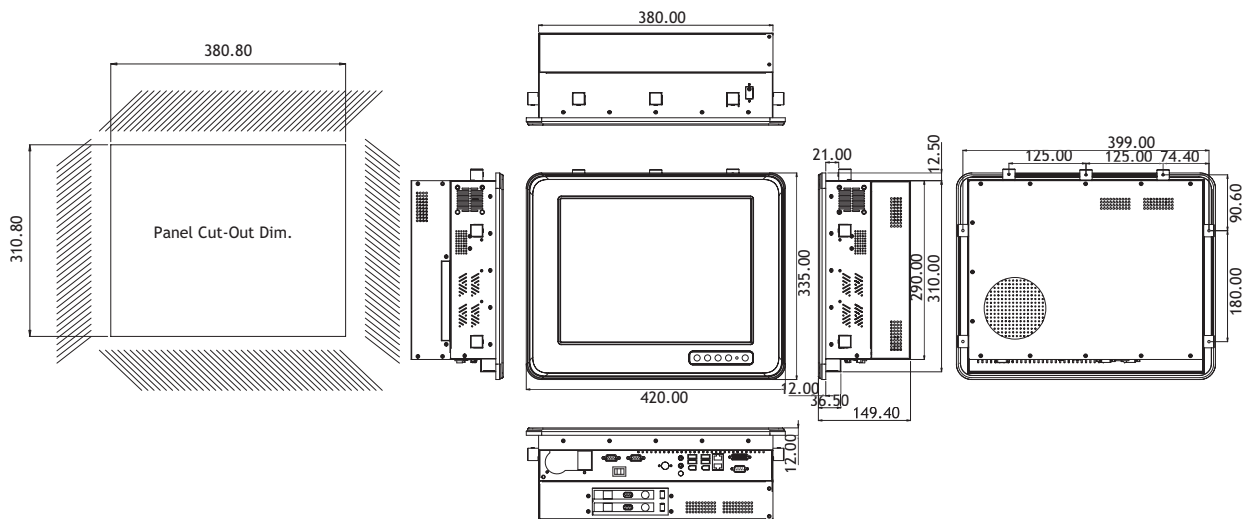

Touch Panel Computers for Various Industry Applications

Digital Signage and Display Solutions

Medical Panel Computers

Medical Grade Monitors

GOT Fanless Touch Panel Computers

Touch Panel Computers for Infotainment

Touch Panel Computers for Automation

Touch Panel Monitors for Automation

Open Frame Panel Computers

Accessories