

OFP215

21.5" Full HD Digital Signage with Intel® Atom™ Processor N330 1.6 GHz



Specifications

Front Bezel	Custom Logo	
LCD Panel	Size	21.5"
	Contrast	1000 : 1
	Pixel Pitch	248 x 248 (um)
	Viewing Angle (H/V)	160° x 170°
	Response Time	5ms
	Color	16.7M
	Brightness (cd/m ²)	300
Board	CPU	Intel® Atom™ processor N330 1.6 GHz
	Onboard Graphics	Intel® 945GC
	Front Side Bus	533 MHz
	Memory	1 x built-in DDR2 DRAM (1GB)
	HDD	1 x built-in 2.5" SATA HDD (80GB)
I/O	4 x USB 2.0	
Ethernet	1 x 10/100/1000Mbps Ethernet	
Expansion Slot	N/A	
Audio	Line-in/Line-out/Mic	
Touchscreen	Optional surface acoustic wave (SAW) type	
Power Supply	AC 100 - 240V power adaptor	
Dimensions	319mm (12.5") (W) x 90.8mm (3.6") (D) x 527mm (20.7") (H)	
Weight(net/gross)	9.8 kg (21.6 lb)/11.2 kg (24.6 lb)	
Environmental	0 - +40°C, operation, 10% - 95% relative humidity	

Packing List

Quick installation guide, manual, driver, utility CD and cable

Packing dimensions:

635mm (25") (W) x 420mm (16.53") (D) x 198mm (7.8") (H)

Features




- 21.5" wide TFT LCD - Full HD 1920 x 1080p
- Intel® Atom™ processor N330 1.6 GHz with 533 MHz MT/s
- With Intel® Gen 3.5 high performance integrated graphics controller
- S-video out
- VESA FPMPI compliant flat panel mounting
- Built-in DDR2 DRAM (1GB) and 2.5" SATA HDD (80GB)
- Optional touchscreen (SAW)

Ordering Information

OFP215	21.5" digital signage platform with Intel® Atom™ processor N330 1.6 GHz, 1920 x 1080P full HD resolution, 1GB DDR2 and 80GB HDD
OFP215-S	21.5" digital signage platform with Intel® Atom™ processor N330 1.6 GHz, 1920 x 1080P full HD resolution, 1GB DDR2, 80GB HDD and SAW touch screen

Dimensions

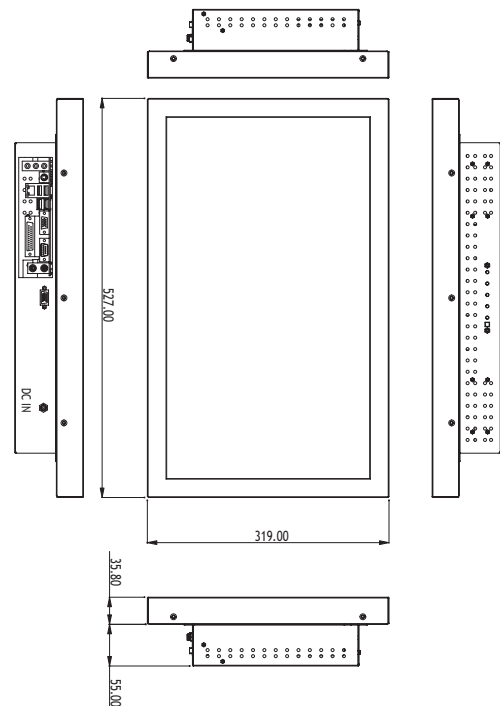

Touch Panel Computers for Various Industry Applications

Digital Signage and Display Solutions

Medical Panel Computers

Medical Grade Monitors

GOT Fanless Touch Panel Computers

Touch Panel Computers for Infotainment

Touch Panel Computers for Automation

Touch Panel Monitors for Automation

Touch Panel Computers with HMI Software