


SDM300S NEW

Intel® Smart Display Module Small (SDM-S) with Intel® Pentium® Processor N4200 & Celeron® Processor N3350

Features

- Intel® Smart Display Module (Intel® SDM) specification
- Intel® Pentium® processor N4200 & Celeron® processor N3350 (Apollo Lake)
- 4GB LPDDR4 memory onboard (8GB optional)
- 64GB eMMC onboard (32G optional)
- One M.2 Key E 2230 slot
- Two USB 3.0 and one GbE LAN
- Small design for easy integration into slim displays
- Optimized for digital signage, public kiosks, professional monitors, point-of-sale
- Projections for magic mirrors, beside terminals, hospitality, and more

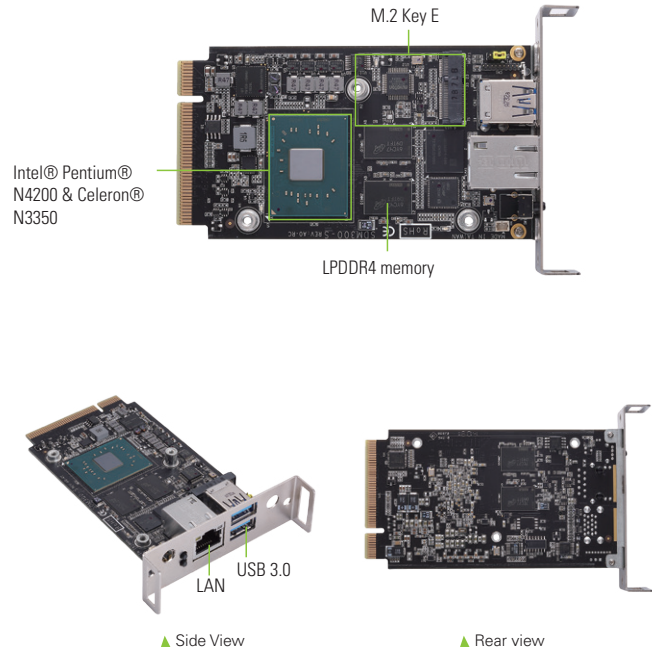

Core System

CPU	Intel® Pentium® processor N4200, Celeron® processor N3350 onboard
System Memory	LPDDR4 4GB memory onboard (8GB optional)
Chipset	SoC integrated
SSD	64GB eMMC onboard (32G optional)
WatchDog Timer	255 levels, 1 to 255 sec./min.
Expansion Interface	1 x M.2 Key E 2230 slot
Battery Lithium	Lithium 3 V/220 mAh
Power Input	Through SDM edge connector +12V & +3.3VBS
Dimensions	100 x 60 mm
Board Thickness	1.6 mm
Operating Temperature	0°C to +55°C (+32°F to +131°F)
Humidity	10% to 95% relative humidity, non-condensing

I/O

I/O Interface	Golden Finger	Standard PCIe x8 (98 pins)
	SDM I/O	1 x USB 3.0 1 x HDMI 1.4 1 x DisplayPort 1.2 1 x Serial TX/RX 2 x I ² C
Rear I/O	1 x 10/100/1000 Mbps with Intel® i211-AT; supports Wake-on-LAN, PXE Boot ROM 2 x USB 3.0	

Display

Chipset	Intel® HD Graphics 505/500 Supports Gfx - DX12.0, OCL 2.0, OGL 4.3
Display Interface (via SDM edge connector)	1 x DisplayPort 1.2 (4096 x 2304 @ 60p) 1 x HDMI 1.4 (3840 x 2160 @ 30p)

Packing List

Quick installation guide

Ordering Information

Standard	
SDM300S-N4200-4GB	SDM-S module with Intel® Pentium® processor N4200, DisplayPort, HDMI, GbE LAN and USB 3.0
SDM300S-N3350-4GB	SDM-S module with Intel® Celeron® processor N3350, DisplayPort, HDMI, GbE LAN and USB 3.0

Optional	
SDB100	SDM carrier board

