


tBOX400-510-FL Quick Installation Guide

Step 5 Install the DDR module with caution and put the thermal pad on the DDR module again. Then screw the DDR cover to finish the installation.

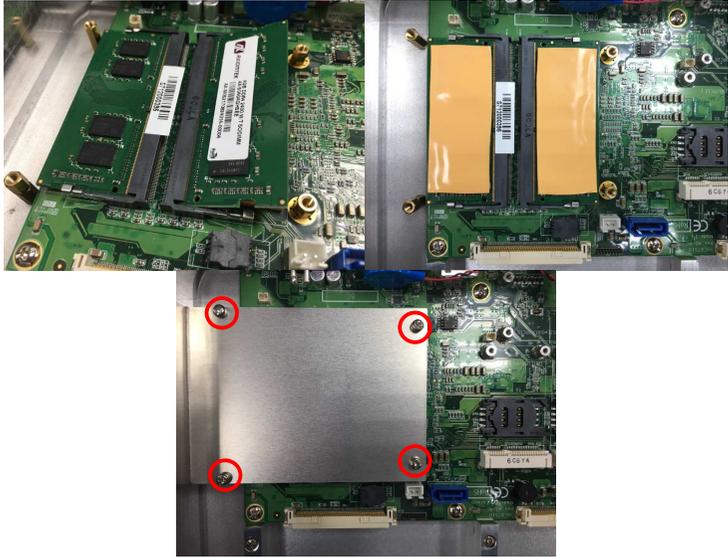


Packing List

- ✓ System Unit x 1
- ✓ Quick Installation Guide x 1
- ✓ DCD x 1 (for Drivers)
- ✓ Foot Pad x 4
- ✓ Screw Pack x 1
- ✓ HDD Mylar x 4
- ✓ SATA Drive Key x 2
- ✓ DRAM Thermal Pad x 4
- ✓ Wall Mount Bracket x 2

Note: Please contact your local distributor if any of the above-mentioned items is missing or damaged. DO NOT apply power to the board if any component is damaged.


Dimensions

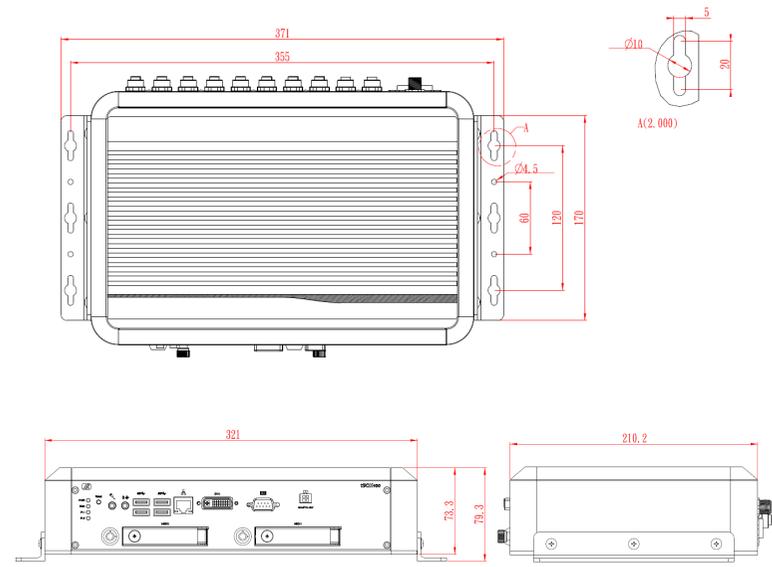

I/O Outlets


The following figures show the I/O outlets on the front panel of the tBOX400-510-FL series.

▼ Front View

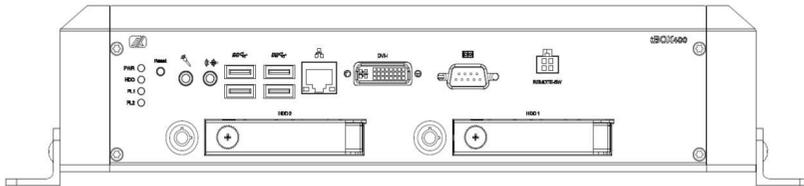

Installing the HDD/SSD

Step 1 Attach a Mylar on the HDD/SSD and screw the HDD/SSD on the tray.

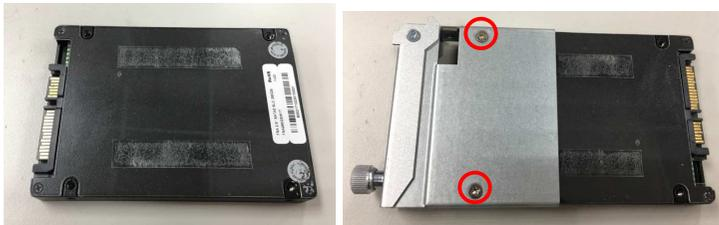

Step 2 Install the SATA drive into the slot and fasten the screw to lock the SATA drive to complete the installation.



Installing the DDR Module

Step 1 Make sure the system is powered off and unplug the power cord.

Step 2 Turn the tBOX400-510-FL upside down, loosen the cover screws and lift the bracket a little bit as shown.



Step 3 Disconnect the four SATA connectors and remove the bracket.



Step 4 Loosen below screws to remove the cover and put the thermal pad on the slot.

